

ACOUSTIC  
FELT



**FeltVibe**®

**3D Deep Acoustic  
PET Felt Wall Panels**


### **3D Deep Acoustic PET Felt Panel**

High-Performance Acoustic Design with Added Depth The 3D Deep Acoustic PET Felt Wall Panel Collection offers decorative, high-performance acoustic solutions for interior spaces, delivering up to Class A sound absorption. With its wide colour range, the collection enables flexible and visually striking design applications.

Thanks to their lightweight structure, the panels are easy to install, reposition, and reuse in different layouts. Smart mounting options make it simple to change colours over time and adapt configurations to suit evolving needs.

## 3D Deep Acoustic PET Felt Panel



# MOONBASE

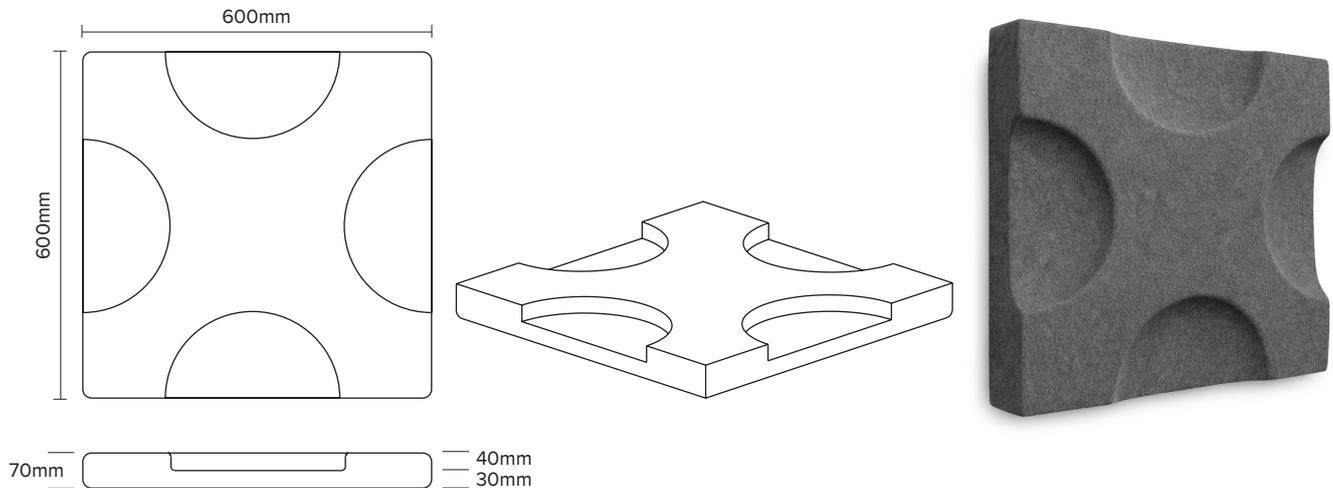

### SPECIFICATIONS


<b>MATERIAL</b>	ARKETA: 100% PET, 60% recycled content ARKEATA ECOCO: 100% recycled PET
<b>DIMENSIONS (MM)</b>	W: 600 L: 600 H: 70
<b>THICKNESS &amp; WEIGHT</b>	ARKETA: 12mm ( $\pm 0.5$ mm), 2400 g/m <sup>2</sup> ( $\pm 10$ ) ARKEATA ECOCO: 12mm ( $\pm 0.5$ mm), 2400 g/m <sup>2</sup> ( $\pm 10$ ) ICHOS: 12mm ( $\pm 0.5$ mm), 2200 + 200 g/m <sup>2</sup> ( $\pm 10$ )
<b>ACOUSTIC PERFORMANCE</b>	NRC: 0.80 (directly on the wall) NRC: 1.00 (directly mounted on wall + additional backing felt layer)
<b>FIRE TEST DATA</b>	EN 1021-1: Cigarette test EN 13501-1 (SBI): Class B-s1,d0 (adhered)
<b>ENVIRONMENT</b>	VOC emission formaldehyde free, Phenol-free, OEKO-TEX Class 1, Phthalate Free
<b>CLEANNING</b>	Vacuum regularly. Professionally dry clean or wipe clean with a damp cloth


### ACOUSTIC PROPERTIES

Mounting method	 Directly on the wall	 Directly mounted on wall + additional backing felt layer
NRC	0.80	1.00
$\alpha_w$	0.70	1.00
Class	C	A






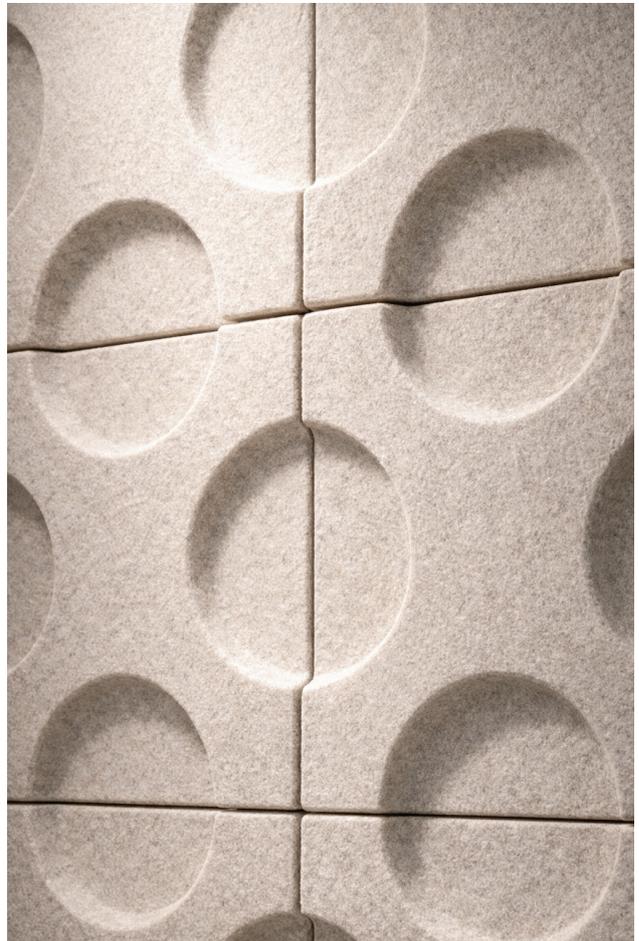

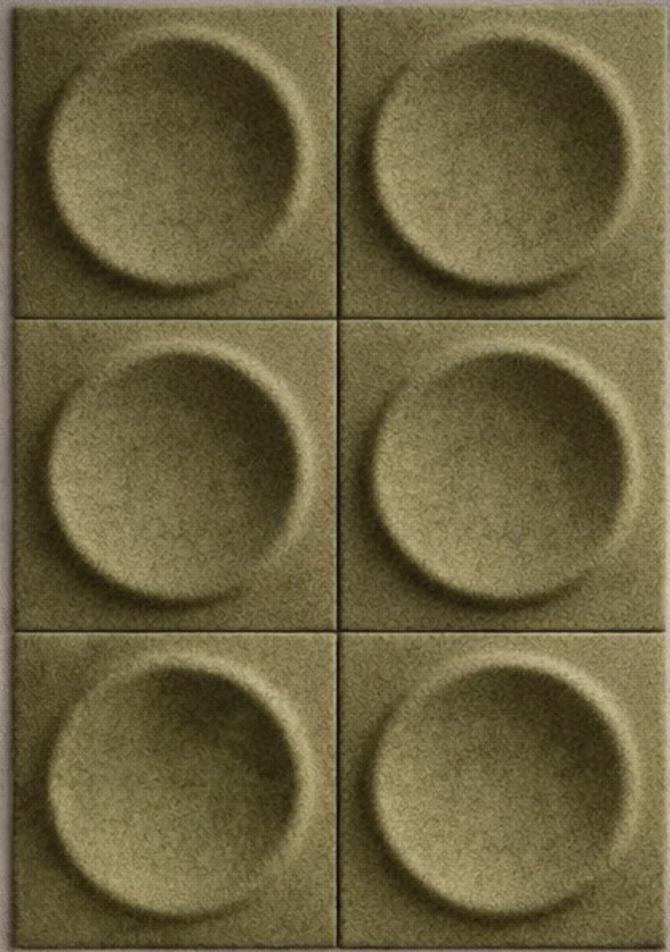

## 3D Deep Acoustic PET Felt Tiles

# CAP

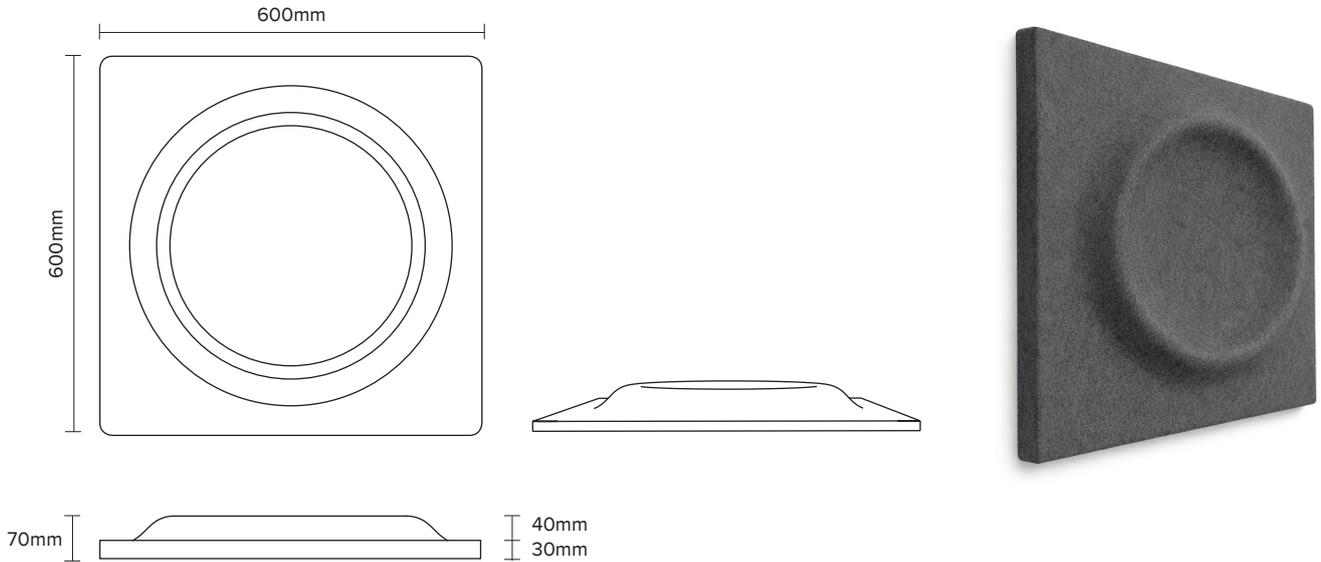

### SPECIFICATIONS


<b>MATERIAL</b>	ARKETA: 100% PET, 60% recycled content ARKEATA ECOCO: 100% recycled PET
<b>DIMENSIONS (MM)</b>	W: 600 L: 600 H: 70
<b>THICKNESS &amp; WEIGHT</b>	ARKETA: 12mm ( $\pm 0.5$ mm), 2400 g/m <sup>2</sup> ( $\pm 10$ ) ARKEATA ECOCO: 12mm ( $\pm 0.5$ mm), 2400 g/m <sup>2</sup> ( $\pm 10$ ) ICHOS: 12mm ( $\pm 0.5$ mm), 2200 + 200 g/m <sup>2</sup> ( $\pm 10$ )
<b>ACOUSTIC PERFORMANCE</b>	NRC: 0.80 (directly on the wall) NRC: 1.00 (directly mounted on wall + additional backing felt layer)
<b>FIRE TEST DATA</b>	EN 1021-1: Cigarette test EN 13501-1 (SBI): Class B-s1,d0 (adhered)
<b>ENVIRONMENT</b>	VOC emission formaldehyde free, Phenol-free, OEKO-TEX Class 1, Phthalate Free
<b>CLEANING</b>	Vacuum regularly. Professionally dry clean or wipe clean with a damp cloth

### ACOUSTIC PROPERTIES

Mounting method	Directly on the wall	Directly mounted on wall + additional backing felt layer
NRC	0.80	1.00
$\alpha_w$	0.70	1.00
Class	C	A






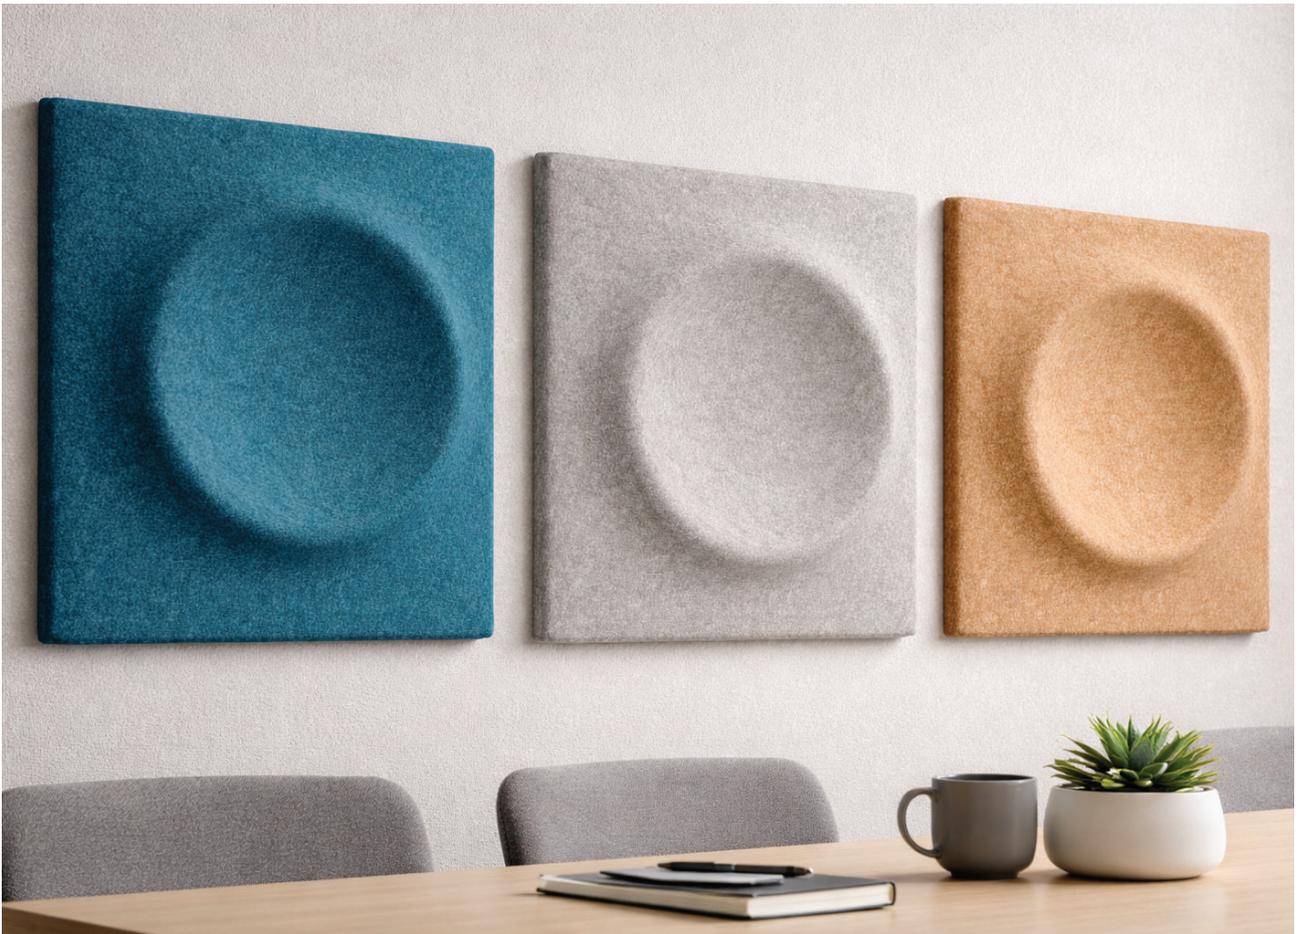

## ICHOS HEATHERED PET FELT PANELCOLLECTION



## ARKETA PET FELT COLLECTION

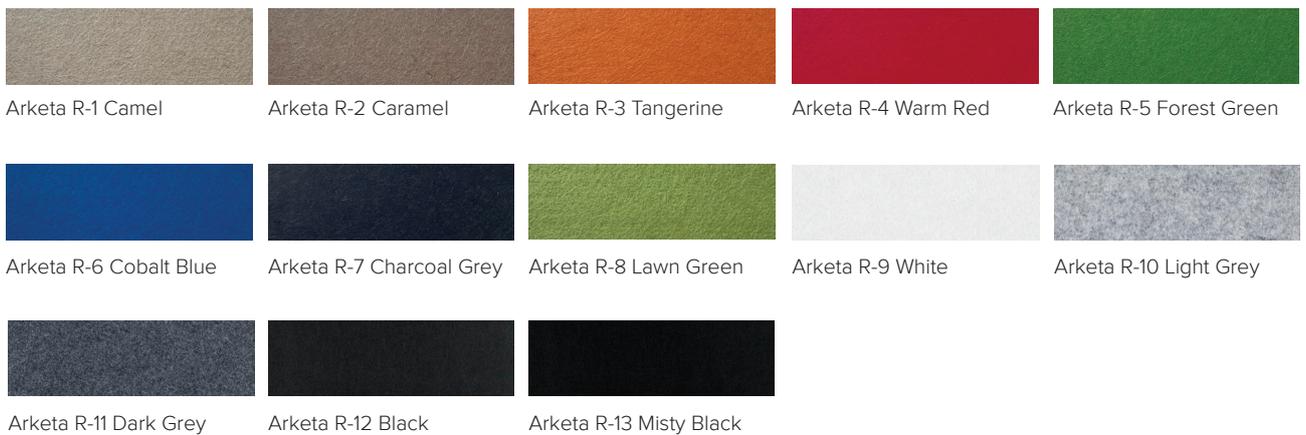

## ARKETA ECOCO PET FELT COLLECTION



## ICHOS FLAT PET FELT PANEL COLLECTION



## PRINTED PET FELT COLLECTION (WOOD - MARBLE)





**HEAD OFFICE**

Savaş Cad. Söğüt Sok. No: 1  
34164 Merter, İstanbul, Türkiye  
**T:** +90 212 637 09 89  
**F:** +90 212 637 02 96  
info@feltvibe.com

**DÜZCE FACTORY**

Organize Sanayii Bölgesi 13. Ada  
1/4 Parsel Beyköy Belediyesi  
81060 Düzce, Türkiye  
**T:** +90 380 553 73 68-69  
**F:** +90 380 553 73 68-69

**GEREDE FACTORY**

Gerkonsan Organize  
Sanayii Bölgesi  
14900 Gerede, Bolu, Türkiye  
**T:** +90 374 311 82 57 / 58  
**F:** +90 374 311 66 37

**İZMİR BRANCH**

MTK Sitesi 747/ 2 Sokak  
No:37 6003 ADA, 6003  
Altındağ, İzmir, Türkiye  
**T:** +90 232 431 08 17-18  
**F:** +90 232 431 08 19

[www.feltvibe.com](http://www.feltvibe.com)

03.12.26