

ACOUSTIC
FELT



FeltVibe®



GENTUĞ



Embossed Pinsonic

Acoustic Felt Wall & Ceiling Panels

Product Guide

Embossed Pinsonic


Acoustic Felt Wall & Ceiling Panels

2 nd Layer

SATIS Acoustically
Transparent Recycled
Nonwoven Fabric,
Embossed Pinsonic
(Surface Finishes)


1 st Layer

ARKETA Acoustic
Felt Panel
(Base Material)

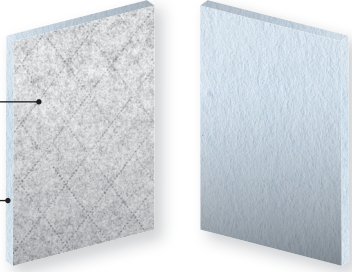


Experience personalized acoustic panels with Embossed Pinsonic Acoustic Felt, offering a range of colors and collections for ARKETA Panel materials. Embossed Pinsonic Diamond, Embossed Pinsonic Wave, Embossed Pinsonic Big Wave Felt Fabric Printing allows for creative, stylish transformations with adjustable material thickness for enhanced acoustic performance.


EMBOSED PINSONIC COLLECTION

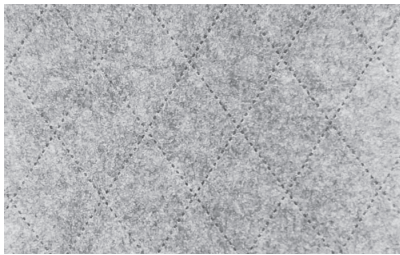

Embossed Pinsonic Diamond

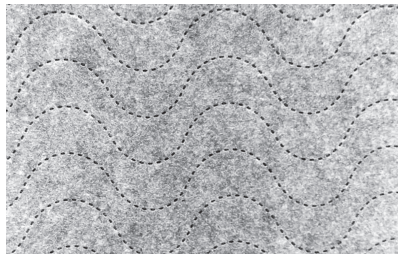

Embossed Pinsonic Wave

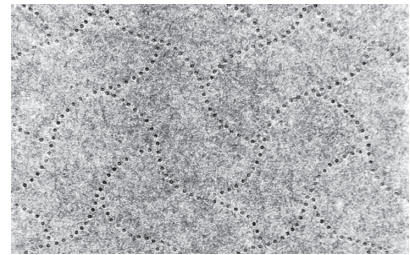

Embossed Pinsonic Big Wave



ARKETA Acoustic Felt Panel (Base Material) + SATIS Acoustically Transparent Recyled Nonwoven Fabric (Surfece Finishes)= ICHOS

SPECIFICATIONS

COMPOSITION	60% Recyled Polyester (PET) (100% Pes)
DIMENSIONS	1200 x 2800mm, 1200 x 2400mm, 600 x 600mm Max. Width: 1500mm
THICKNESS / WEIGHT	3mm (±0,5 mm) / 750 g/m ² (± 10%) 6mm (±0,5 mm) / min. 1000 g/m ² (± 10%) / max. 1500 g/m ² (± 10%) 7mm (±0,5 mm) / min. 1100 g/m ² (± 10%) / max. 1500 g/m ² (± 10%) 8mm (±0,5 mm) / min. 1200 g/m ² (± 10%) / max. 1500 g/m ² (± 10%) 9mm (±0,5 mm) / min. 1200 g/m ² (± 10%) / max. 1500 g/m ² (± 10%) 11mm (±0,5 mm) / 2000 g/m ² (± 10%)
COLOR	ARKETA 5 color
ACOUSTIC	NRC: up to 0.64 Class D (subject to mounting conditions)
THERMAL RESISTANCE	0.0446 W/m ² K
FIRE TEST STANDARDS	EN 1021 - 1 (cigarette) EN 13501-1 (SBI) Adhered Class B-s1,d0
LIGHT FASTNESS	4+ (ISO 105 - B02)
ENVIRONMENT	Min. %60 recycled PET Non VOCs emission formaldehyde free and Phenol-free Oekotex Class 1, Phthalate Free

SATIS (Surfece Finishes)

COMPOSITION	60% Recyled Polyester (PET) (70% Pes - 20% Polyamid - 10% Viskon)
WEIGHT	200 g/m ² approx
WIDTH	Max. Width: 1500mm (-0 /+3mm)
PATTERN / COLOR	Embossed Pinsonic Collection / 15 color heathered, 15 color flat
ENVIRONMENT	Non VOCs emission formaldehyde free and Phenol-free Oekotex Class 1, Phthalate Free
FIRE TESTING	EN 1021 - 1 (cigarette) EN 13501-1 (SBI) Adhered Class B-s1,d0
LIGHT FASTNESS	4+ (ISO 105 - B02)
GENERAL	Tackable, impact resistant, bacteria resistant, moisture resistant, installation friendly.
CLEANNING	Vacuum regularly. Professionally dry clean or wipe clean with a dampcloth.



HEAD OFFICE

Savaş Cad. Söğüt Sok. No: 1
34164 Merter, İstanbul, Türkiye
T: +90 212 637 09 89
F: +90 212 637 02 96
info@feltvibe.com

DÜZCE FACTORY

Organize Sanayii Bölgesi 13. Ada
1/4 Parsel Beyköy Belediyesi
81060 Düzce, Türkiye
T: +90 380 553 73 68-69
F: +90 380 553 73 68-69

GEREDE FACTORY

Gerkonsan Organize
Sanayii Bölgesi
14900 Gerede, Bolu, Türkiye
T: +90 374 311 82 57 / 58
F: +90 374 311 66 37

İZMİR BRANCH

MTK Sitesi 747/ 2 Sokak
No:37 6003 ADA, 6003
Altındağ, İzmir, Türkiye
T: +90 232 431 08 17-18
F: +90 232 431 08 19

FOLLOW US



www.feltvibe.com