


ACOUSTIC  
FELT



**FeltVibe®**



**GENTUĞ**

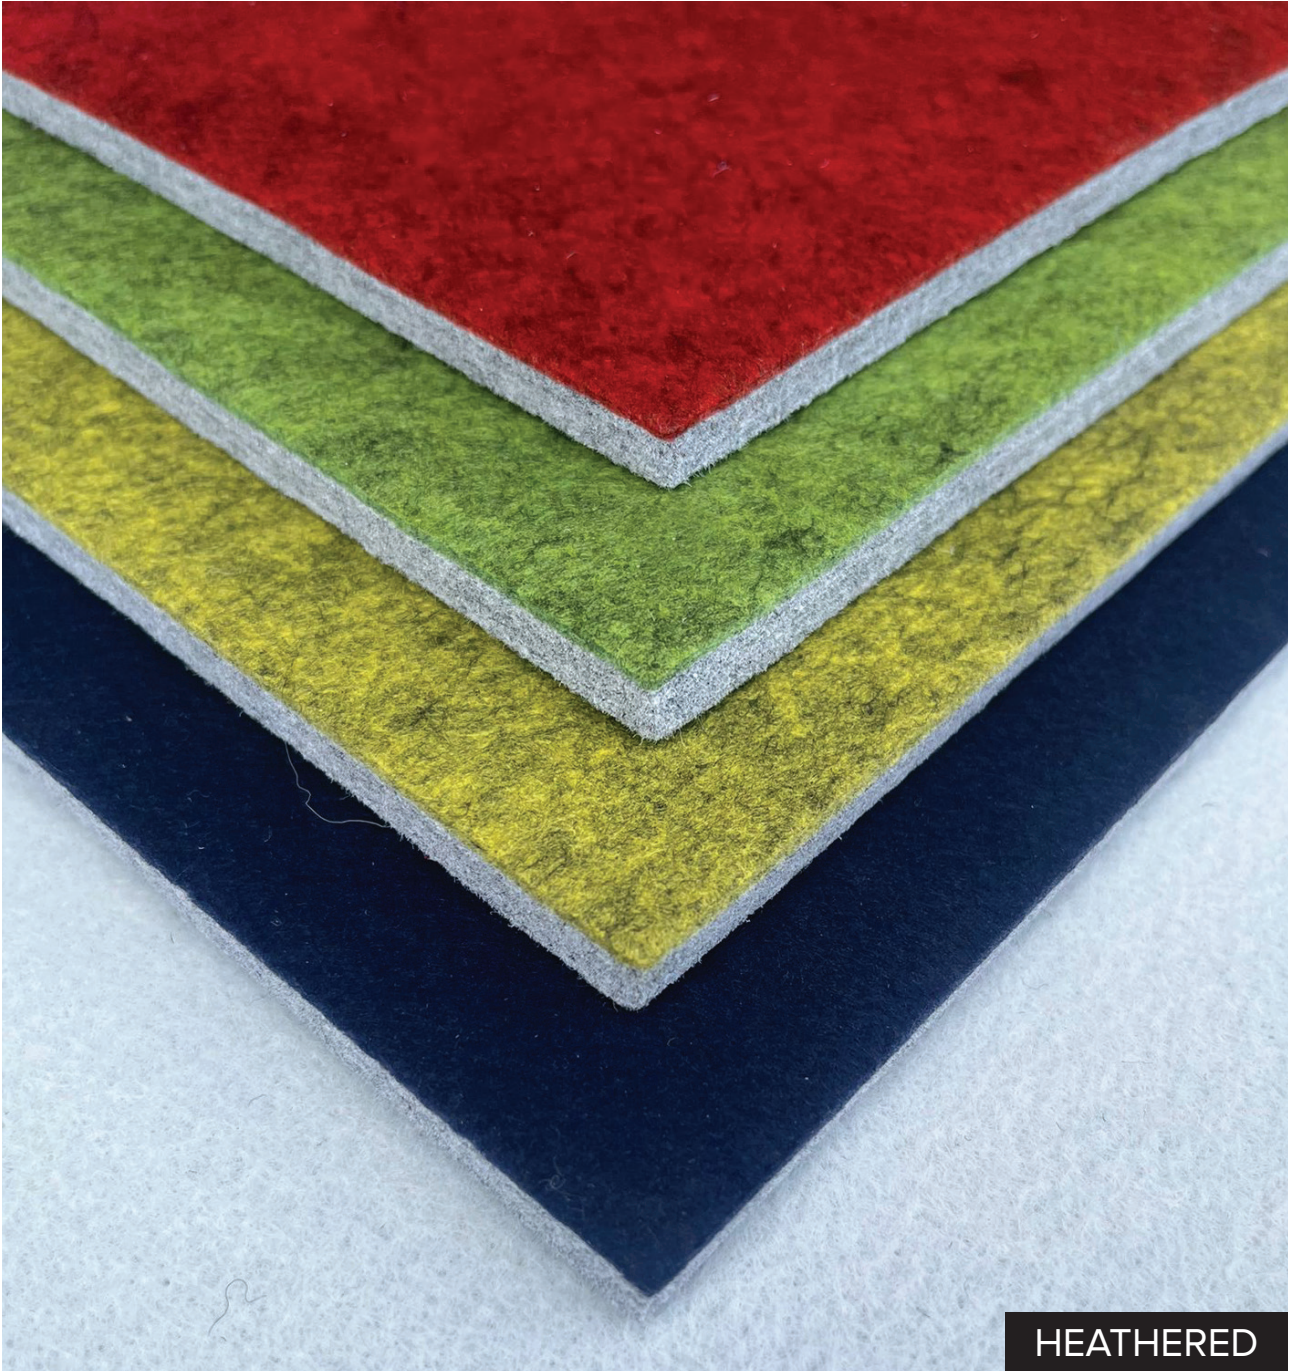

HEATHERED

# Acoustic Laminated Felt Panels

## **ICHOS Heathered** Collections


SATIS Acoustically Transparent Recycled Nonwoven Fabric Surface Finishes

PRODUCT SHEET

# Acoustic Laminated Felt Panels

## ICHOS Heathered Collections


SATIS Acoustically Transparent Recycled Nonwoven Fabric Surface Finishes

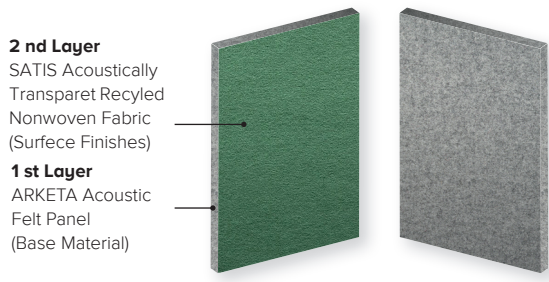

ICHOS is a new revolution in color and acoustical material pairing the high-performance acoustics of ARKETA with the beauty and soft touch of our Satis acoustic felt layers.

ICHOS create unlimited color and texture combinations for all your projects. All materials are made here in Türkiye using recycled raw materials.

### HEATHERED FELT

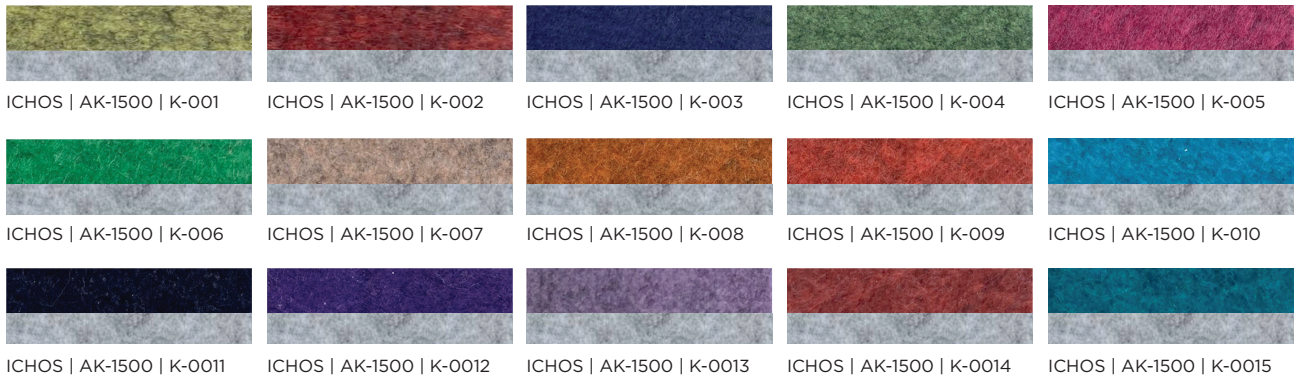

**ARKETA** Acoustic Felt Panel (Base Material) + **SATIS** Acoustically Transparent Recycled Nonwoven Fabric (Surfece Finishes)= **ICHOS**

<b>COMPOSITION</b>	60% Recyled Polyester (PET) (100% Pes)
<b>DIMENSIONS</b>	<b>Max. Width:</b> 1500mm (-0 /+3mm)
<b>THICKNESS / WEIGHT</b>	3mm ( ±0,5 mm) / 750 g/m <sup>2</sup> (± 10%) 6mm ( ±0,5 mm) / min. 1000 g/m <sup>2</sup> (± 10%) / max. 1500 g/m <sup>2</sup> (± 10%) 7mm ( ±0,5 mm) / min. 1100 g/m <sup>2</sup> (± 10%) / max. 1500 g/m <sup>2</sup> (± 10%) 8mm ( ±0,5 mm) / min. 1200 g/m <sup>2</sup> (± 10%) / max. 1500 g/m <sup>2</sup> (± 10%) 9mm ( ±0,5 mm) / min. 1200 g/m <sup>2</sup> (± 10%) / max. 1500 g/m <sup>2</sup> (± 10%) 11mm ( ±0,5 mm) / 2000 g/m <sup>2</sup> (± 10%)
<b>COLOR</b>	ARKETA 5 color
<b>ACOUSTIC</b>	NRC: up to 0.64 Class D (subject to mounting conditions)
<b>THERMAL RESISTANCE</b>	0.0446 W/m <sup>2</sup> K
<b>FIRE TEST STANDARDS</b>	EN 1021 - 1 (cigarette) EN 13501-1 (SBI) Adhered Class B-s1,d0
<b>LIGHT FASTNESS</b>	4+ (ISO 105 - B02)
<b>ENVIRONMENT</b>	Min. %60 recycled PET Non VOCs emission formaldehyde free and Phenol-free Oekotex Class 1, Phthalate Free

**SATIS (Surfece Finishes)**

<b>COMPOSITION</b>	60% Recyled Polyester (PET) ( 70% Pes - 20% Polyamid - 10% Viskon)
<b>WEIGHT</b>	200 g/m <sup>2</sup> approx
<b>WIDTH</b>	<b>Max. Width:</b> 1500mm (-0 /+3mm)
<b>COLOR</b>	15 color heathered
<b>ENVIRONMENT</b>	Non VOCs emission formaldehyde free and Phenol-free Oekotex Class 1, Phthalate Free
<b>FIRE TESTING</b>	EN 1021 - 1 (cigarette) EN 13501-1 (SBI) Adhered Class B-s1,d0
<b>LIGHT FASTNESS</b>	4+ (ISO 105 - B02)
<b>CLEANNING</b>	Vacuum regularly. Professionally dry clean or wipe clean with a dampcloth.
<b>GENERAL</b>	Tackable, impact resistant, bacteria resistant, moisture resistant, installation friendly.



**HEAD OFFICE**

Savaş Cad. Söğüt Sok. No: 1  
34164 Merter, İstanbul, Türkiye  
**T:** +90 212 637 09 89  
**F:** +90 212 637 02 96  
info@feltvibe.com

**DÜZCE FACTORY**

Organize Sanayii Bölgesi 13. Ada  
1/4 Parsel Beyköy Belediyesi  
81060 Düzce, Türkiye  
**T:** +90 380 553 73 68-69  
**F:** +90 380 553 73 68-69

**GEREDE FACTORY**

Gerkonsan Organize  
Sanayii Bölgesi  
14900 Gerede, Bolu, Türkiye  
**T:** +90 374 311 82 57 / 58  
**F:** +90 374 311 66 37

**İZMİR BRANCH**

MTK Sitesi 747/ 2 Sokak  
No:37 6003 ADA, 6003  
Altındağ, İzmir, Türkiye  
**T:** +90 232 431 08 17-18  
**F:** +90 232 431 08 19

**FOLLOW US**



[www.feltvibe.com](http://www.feltvibe.com)