




Acoustik PET Felt Desk Division




Desk Screen System

Desk Screens are a great way to absorb sound, add privacy, color and style in any open plan workspace, enhancing speech intelligibility making every office space a better place to work in. Desk screens are a welcome addition to any open plan office and are totally customizable for size, shape, hole pattern and color.

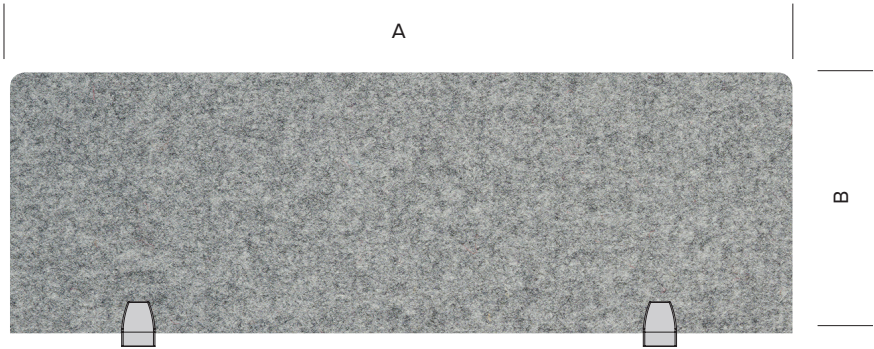

FLAT

A	B	Thickness
1200	600	12-18-20-24
1500	600	12-18-20-24
1800	600	12-18-20-24

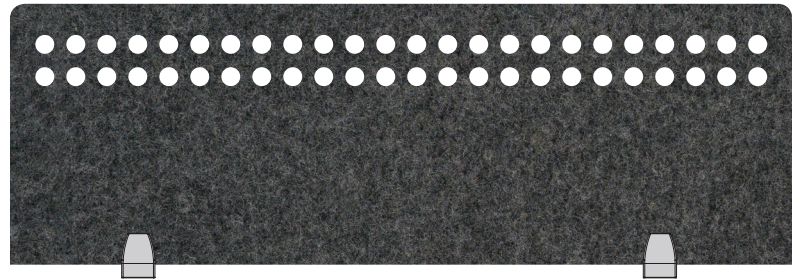


CIRCULAR




RECTANGLE

Desk Return Screen


Desk Return Screens are a simple and effective way to ensure privacy and deaden sound between bench style desks and workstations. Available in a range of both colors and high performance acoustic properties.



RET420

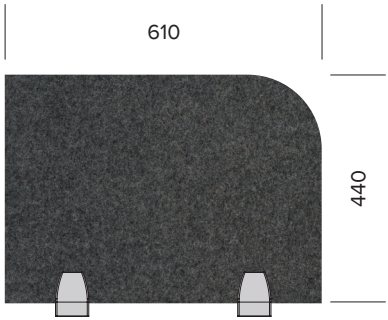

RET440

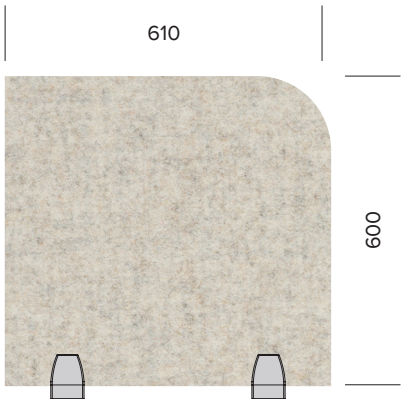


RET600

Thickness
12-18-20-24
12-18-20-24
12-18-20-24

For special shapes and sizes, please contact the sales department.

Hardware


Desk Screen Bracket






Desk Screen Bracket
Product Name: Desk Partition Clamp
Model: PJ-4
Regular Colors: White / Black / Sliver
Panel Thickness Clip: 12-18-20mm




Desk Screen Bracket
Product Name: Desk Partition Clamp
Model: PJ-3-1
Regular Colors: White / Black / Sliver
Panel Thickness Clip: 12-18-20mm




Desk Screen Bracket
Product Name: Desk Partition Clamp
Model: PJ-25
Regular Colors: White / Black / Sliver
Panel Thickness Clip: 18-20-25mm




Adjustable Desk Divider Partition Clips



Desk Divider Partition Clips



Desk Divider Partition Clips
+
Desk Screen Bracket PJ-3-1




Desk Divider Partition Clips
+
Desk Screen Bracket PJ-4

SPECIFICATIONS

COMPOSITION	%100 Recyled Polyester Low Melt Fibres
DIMENSIONS	Width: Production is made between 300mm and 2700mm.
THICKNESS & WEIGHT	12mm (±0.5mm) 2400 g/m ² (±10%) 18mm (±0.5mm) 3500 g/m ² (±10%) 20mm (±0.5mm) 3000 g/m ² (±10%) 24mm (±0.5mm) 3500 g/m ² (±10%)
ACOUSTIC	NRC: up to 0.30 - 0.90 (subject to mounting conditions)
FIRE TEST STANDARDS	EN 1021 - 1 (cigarette) EN 13501-1 (SBI) Adhered Class B-s1,d0
LIGHT FASTNESS	4+ (ISO 105 - B02)
ENVIRONMENT	Non VOCs emission formaldehyde free and Phenol-free, Oekotex Class 1, Phthalate Free
CLEANNING	Vacuum regularly. Professionally dry clean or wipe clean with a dampcloth.

ARKETA ECOCO | ACOUSTIC PET FELT COLLECTIONS




Arketa Ecoco | E001




Arketa Ecoco | E002




Arketa Ecoco | E003



Arketa Ecoco | E004



Arketa Ecoco | E005



Arketa Ecoco | E006



HEAD OFFICE

Savaş Cad. Söğüt Sok. No: 1
34164 Merter, İstanbul, Türkiye
T: +90 212 637 09 89
F: +90 212 637 02 96
info@feltvibe.com

DÜZCE FACTORY

Organize Sanayii Bölgesi 13. Ada
1/4 Parsel Beyköy Belediyesi
81060 Düzce, Türkiye
T: +90 380 553 73 68-69
F: +90 380 553 73 68-69

GEREDE FACTORY

Gerkonsan Organize
Sanayii Bölgesi
14900 Gerede, Bolu, Türkiye
T: +90 374 311 82 57 / 58
F: +90 374 311 66 37

İZMİR BRANCH

MTK Sitesi 747/ 2 Sokak
No:37 6003 ADA, 6003
Altındağ, İzmir, Türkiye
T: +90 232 431 08 17-18
F: +90 232 431 08 19

FOLLOW US



www.feltvibe.com